



NFC SensorTag

sigmavista it consulting gmbh
Johann-Roithner-Strasse 131
4050 Traun
Austria

Tel.: +43 7229 90300-0
Fax: +43 7229 90300-70
E-Mail: office@sigmavista.com
Web: www.sigmavista.com



Measuring point analysis and control for technical maintenance

Vibration detection, control of technical maintenance on machines, production facilities and climate monitoring, the data transmission is done via smartphone.



NFC SensorTag

The NFC SensorTag is available in several product configurations and delivers reliable accurate data about temperature, humidity and crash detection to you. Due to rugged enclosure types, the NFC SensorTag can be used in numerous application areas.

The stored measurement values are easily accessible via NFC on an Android Smartphone. To check the measurement data as well as to parameterize the NFC SensorTag, a Web application is available.

For more custom software solutions for the management of measurement data or additional readers for data readout, please contact the local sales representative.

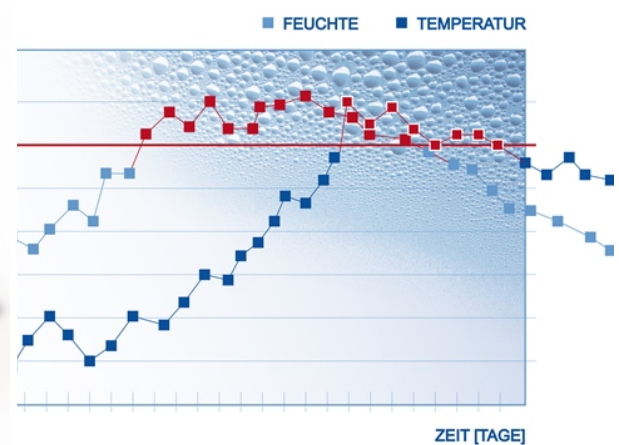


Illustration 1: Sensor Tag Enclosure

Measuring point analysis and control for technical maintenance

Vibration detection, control of technical maintenance on machines, production facilities and climate monitoring, the data transmission is done via smartphone.



NFC SensorTag

SPECIFICATION

Frequency / Protocol*	RFID HF (NFC) ISO 15693, 13.56 MHz
Read range* (depending on the tag type and surroundings)	Up to 1 cm
Dimensions*	113.0 mm × 53.0 mm × 7.0 mm
Mass*	Approx. 30 g
Service life* (depending on the activated sensors, the tag type, the GSM mobile network, the operating temperature range, the mounting location and the configured measurement and transmission intervals over the entire operating period)	Up to 5 years <small>(Used with moderate sensor threshold values / measurement intervals under continuous use is typical to expect a life of 6 months.)</small>
Memory capacity*	Up to 16.000 measurement data UID 16 characters (alphanumeric)
Sampling rate / measurement interval* - Temperature / Humidity - Impact, inclination, operation time	Configurable from 5 sec to 18 hours in 1 sec steps Continuously
Battery monitoring*	Continuously
Operating temperature range*	-5°C to +55°C (peek values)
Storage conditions	+10°C to +30°C at 20% RH to 60% RH
Sensors*	<ul style="list-style-type: none">- Temperature, humidity (filter cap protected)- Crash detection, inclination and operation time means of an acceleration measurement- Expiration date, geo information (by APP loc.)

Measuring point analysis and control for technical maintenance

Vibration detection, control of technical maintenance on machines, production facilities and climate monitoring, the data transmission is done via smartphone.



NFC SensorTag

Sensor and alarm activation	Adjustable and ability of activation independently
Operating mode*	According to the measurement interval and mode, all measured values are stored in the internal non-volatile memory
IP rating*	IP 4X
Mounting*	Enclosure with two holes for mounting with cable ties or M3 screws
Product color*	Blue
Device parameterization*	<ul style="list-style-type: none">- Default parameters are set at production- Individual parameterization
Evaluated Android Smartphones capable of NFC	<ul style="list-style-type: none">- Samsung Galaxy S4 GT-I9505- Samsung Galaxy S5 SM-G900F- Sony Xperia Z3 D6603- Sony Xperia Z5 E5823

* depending on the version and configuration of the product

Measuring point analysis and control for technical maintenance

Vibration detection, control of technical maintenance on machines, production facilities and climate monitoring, the data transmission is done via smartphone.



NFC SensorTag

SENSOR SPECIFICATION*

Relative Humidity	Operating range Resolution Accuracy	0 %RH to 100 %RH 0.04 %RH typical ± 4.5 %RH, maximum ± 7.5 %RH @ 0 %RH to 10 %RH typical ± 3.8 %RH, maximum ± 6.0 %RH @ 10 %RH to 20 %RH typical ± 3.0 %RH, maximum ± 4.5 %RH @ 20 %RH to 80 %RH typical ± 3.8 %RH, maximum ± 6.0 %RH @ 80 %RH to 90 %RH typical ± 4.5 %RH, maximum ± 7.5 %RH @ 90 %RH to 100 %RH
Temperature	Operating range Resolution Accuracy	-25°C to +70°C 0.04°C typical ± 0.60 °C, maximal ± 0.95 °C @ -25°C to +5°C typical ± 0.30 °C, maximal ± 0.45 °C @ +5°C to +60°C typical ± 0.45 °C, maximal ± 0.65 °C @ +60°C to +70°C
Crash Acceleration	Operating mode: continuous	Up to 8.00 g, internal resolution 0.07 g, an alarm event is stored
Inclination	Operating mode: continuous	In 20° counts beyond the threshold, an alarm event is stored
Expiration date	Operating mode: continuous	An alarm event is stored
Geo Information	NFC Read out	By Smartphone GSM cell identification, variance up to 30 km, depending on GSM network (not available with WLAN)
Response time of the sensors		Application specific as it is dependent on, e.g., environmental temperature, air ventilation and mounting

Measuring point analysis and control for technical maintenance

Vibration detection, control of technical maintenance on machines, production facilities and climate monitoring, the data transmission is done via smartphone.



NFC SensorTag

** depending on the version and configuration of the product*

Batteries are factory installed in the product. The NFC SensorTag also consumed energy in a deactivated recording state because of the used technology. Depending on usage and model self-heating of the device can occur. Devices may only be stored in original packaging. The applicable shipping regulations for batteries must be observed.